

StarRov®

Direct Roving 908

Product description:

StarRov® 908 direct roving is manufactured by direct winding of continuous glass fibers of defined diameter into a cylindrical roving package. It is characterized by silane sizing, most suitable for reinforcement of epoxy, vinylester and polyester resins, designed for pultrusion applications. StarRov® direct rovings with 908 sizing are easy to unwind with an even tension and very low fuzz generation. The wettability of StarRov® direct roving 908 is excellent.



Designation and technical data:


JM designation	Region	Glass type	Sizing designation	LOI content [%]	Moisture content maximum [%]	Linear density [yield / tex]	Filament diameter [µm]
PR 220 1200 908	EU	E	908	0.6	0.15	413 / 1200	16
PR 440 2400 908	EU	E	908	0.6	0.15	207 / 2400	16
PR 440 4800 908	EU	E	908	0.6	0.15	103 / 4800	23
PR 440 9600 908	EU	E	908	0.75	0.15	56 / 9600	33

Resin compatibility:

Epoxy, unsaturated polyester and polyvinylester

Benefits:

- Easy to unwind with an even tension
- Very low fuzz generation during processing
- Outstanding processing behavior
- Superior wettability

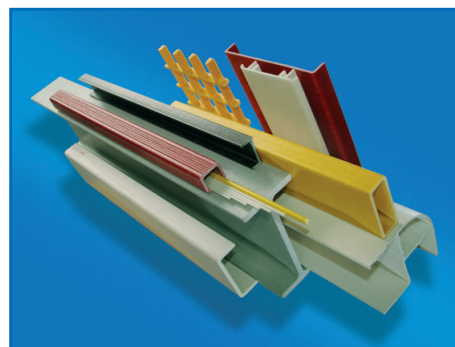

Bobbin dimensions:

	Inner diameter	Outer diameter	Height	Typical weight	Bobbin wrap
All 908 types	160 mm	300 mm	255 mm	20 kg	Tack wrap

The values listed represent min level.

Packaging:

	Bobbins per pallet	Pallet weight appr.	Pallet dimensions	Packaging wrap
All 908 types	48	960 kg	1285 mm x 950 mm	Stretch foil

Storage:

It is recommended that the glass fiber products are stored in a cool and dry environment. Recommended temperature range of storage is 10°C - max. 30°C (50°F - max. 86°F) and relative humidity between 50 – 75%. The glass fiber products should remain in the packaging until just prior to use. The pallets should be single stacked.

Values:

All data represent typical average values.

Warranty disclaimer:

The physical (or chemical) properties of Johns Manville products represent typical average values obtained in accordance with accepted test methods at the time of manufacture and are subject to normal manufacturing variations. They are supplied as a technical service and are subject to change without notice. Check the Johns Manville office to assure current information. For a copy of the Johns Manville Limited Warranty and Limitation of Remedy or other product information, contact your local Sales Representative.



US Headquarters

Johns Manville
717 17th Street
Denver, CO 80202 · USA
Phone: +1 (303) 978 2000

Customer-Service-Offices:

Johns Manville
7500 Dutch Road
Waterville, OH 43566 · USA
Phone: +1 (800) 554 4830
Fax: +1 (419) 878 1110

Johns Manville Slovakia, a.s.
Strojársená 1
91799 Trnava · Slovakia
Phone: +421 (0) 33 5918 249
Fax: +421 (0) 33 5918 808

Johns Manville Asia Trading Co., Ltd.
No. 153, Huaying Road, QingPu
Shanghai 201700 · P.R. China
Mobile: +86 137 01863464
Phone: +86 21 5972 0007
Fax: +86 21 5972 8116

StarRov® 908

February 2007

Johns Manville Sales GmbH
Werner-Schuller-Strasse 1 · D- 97877 Wertheim